

ISSN 2310-6697

otoiser—open transactions on independent scientific-engineering research

# FUNKTECHNIKPLUS # JOURNAL

Théorie—Expérimentation—Métrologie—Logiciel—Applications

ISSUE 7 – SUNDAY 31 MAY 2015 – YEAR 2

1 Contents

2 About

3 Editorial Board – Technical Support

4 Information for Peers – Guiding Principles

# Electrical Engineering – Théorie

7 Thoughts on the Possibility of Damage of High-Voltage Electrical Insulation below the so-called Inception Voltage: The Historical Background – Part I  
M.G. Danikas, Yi Yin, Jialei Hu

# Telecommunications Engineering – Applications

19 A Planar Delta-Cross Shaped Loop Antenna: Analysis and Simulation – The 2 WL Case  
G.A. Papadaniel, N.I. Yannopoulou, P.E. Zimourtopoulos



*This small European Journal is  
In the Defense of Honesty in Science and Ethics in Engineering*

**Publisher** – otoiser—open transactions on independent scientific engineering research, [www.otoiser.org](http://www.otoiser.org) – [info@otoiser.org](mailto:info@otoiser.org), Hauptstraße 52, 2831 Scheiblingkirchen, Austria

**Language** – We declare the origins of the Journal by using in the cover page English, German and French, as well as, a Hellenic vignette. However, since we recognize the dominance of US English in the technical literature, we adopted it as the Journal's language, although it is not our native language.

**Focus** – We consider Radio-FUNK, which still creates a vivid impression of the untouchable, and its Technology-TECHNIK, from an Advanced-PLUS point of view, Plus-PLUS Telecommunications Engineering, Electrical Engineering and Computer Science, that is, we dynamically focus at any related scientific-engineering research regarding Théorie, Expérimentation, Métrologie, Logiciel, ou Applications.

**Scope** – We emphasize this scope broadness by extending the title of the Journal with a Doppelkreuz-Zeichen # which we use as a placeholder for substitution of our Editorial Team disciplines: # Telecommunications etc. as above, or # High Voltage, # Software Engineering, # Simulation etc. as below.

**Frequency** – We publish 3 issues per year: on 31st of January, on 31st of May, and on 30th of September, as well as, an extra issue every 3 papers and a volume every 2 years.

**Editions** – We increase the edition number of an issue only when is needed to reform one or more of its papers—thus to increase their version numbers—but we keep unchanged its 1st edition date shown on its front page and we number its pages sequentially from 1. We count the editions of *About* separately.

**Format** – We use a fixed-space font, hyphenation, justification, unfixed word spacing, and the uncommon for Journals A5 (half A4) page size to achieve WYSIWYG printing and clear reading of 2 to 4 side-by-side pages on wide-screen displays

**Printing-on-Demand** – We can email gratis PDFs at 300-4000 dpi in booklet page scaling of either brochure or book type.

**Copyright** – We publish under a Creative Commons Attribution, CC-BY 3.0 Unported or CC-BY 4.0 International, License only.

Please download the latest *About* edition from  
[about.ftpj.otoiser.org](http://about.ftpj.otoiser.org)

**Editorial Team****# Electrical Engineering**

# High Voltage Engineering # Insulating Materials

Professor Michael Danikas, mdanikas@ee.duth.gr  
EECE, Democritus University of Thrace, Greece

# Electrical Machines # Renewable Energies # Electric Vehicles

Assistant Professor Athanasios Karlis, akarlis@ee.duth.gr  
EECE, Democritus University of Thrace, Greece

**# Computer Science**

# Computer Engineering # Software Engineering # Cyber Security

Professor Vasilis Katos, vkatos@bournemouth.ac.uk  
Head of Computer and Informatics Dept, Bournemouth Univ, UK

# Internet Engineering # Learning Management Systems

Lecturer Sotirios Kontogiannis, skontog@gmail.com  
Business Administration Dept, TEI, Western Macedonia, Greece

# Hypercomputation # Fuzzy Computation # Digital Typography

Dr. Apostolos Syropoulos, asyropoulos@yahoo.com  
BSc-Physics, MSc-Computer Science, PhD-Computer Science  
Independent Researcher, Xanthi, Greece

**# Telecommunications Engineering**

# Applied EM Electromagnetics # Applied Mathematics

Dr. Nikolaos Berketis, nberketis@gmail.com  
BSc-Mathematics, MSc-Applied Maths, PhD-Applied Mathematics  
Independent Researcher, Athens, Greece

# Antennas # Metrology # EM Software # Simulation # Virtual Labs

# Applied EM # Education # FLOSS # Amateur Radio # Electronics

Dr. Nikolitsa Yannopoulou, yin@arg.op4.eu \*

Diploma Eng-EE, MEng-Telecom-EECE, PhD-Eng-Antennas-EECE  
Independent Researcher, Scheiblingkirchen, Austria  
Dr. Petros Zimourtopoulos, pez@arg.op4.eu \*

BSc-Physics, MSc-Radio-Electronics, PhD-Antennas-EE  
Independent Researcher, Scheiblingkirchen, Austria

\* Copy & Layout Editing - Proof Reading - Issue & Web Management

**Technical Support**

Konstantinos Kondylis, kkondylis@gmail.com

Diploma Eng-EECE, MEng-EECE, Doha, Qatar

Christos Koutsos, ckoutsos@gmail.com

Diploma Eng-EECE, MEng-EECE, Bratislava, Slovakia

**Information for Authors**

This is a small, but independent, low profile Journal, in which we are all—Authors, Reviewers, Readers, and Editors—free at last to be Peers in Knowledge, without suffering from Journal roles or positions, Professional–Amateur–Academic statuses, or established "impact factorizations", under the following guiding principles:

**Authors** – We know what Work means, we respect the Work of the Independent Researcher in Science and Engineering and we want to exhibit his Work. Thus, we decided to found this Free and Open Access Journal in which to publish this Work. Furthermore, as we care indeed for the Work of the technical author—especially a young or a beginner one—we strongly support the publication of his Work, as follows:

0 We do not demand from the author to transfer his own copyright to us. Instead, we only consider papers resulting from original research work only, and only if the author can assure us that he owns the copyright of his own paper as well as that he submits to the Journal either an original copy or a revised version of his own paper, for possible publication after review—or even for immediate republication, if this paper has already been published after review—but, in any case under a Creative Commons Attribution, CC-BY 3 Unported or CC-BY 4 International, License, only.

1 We encourage the author to submit his own paper written just in Basic English plus Technical Terminology.

2 We encourage the author even to select a pen name, which may drop it at any time to reveal his identity.

3 We encourage the author to submit an accepted for publication paper, which he was forced to decline that publication because it would be based on a review with unacceptable evaluation or derogatory comments.

4 We encourage the author to submit any paper that was rejected after a poor, impotent, inadequate, unreasonable, irresponsible, incompetent, or "just ticking" review.

5 We encourage the author to submit an unreviewed paper of his own that he uploaded on some Open Access repository.

6 We encourage the author to upload his published papers in our Journal to a truly Free Open repository like viXra.org.

7 We provide the author with a decent, express, peer review process, of up to just 4 weeks, by at least 2, either anonymous or onymous, reviewers.

8 We provide the author with the option to choose from 2 review processes: the traditional, anonymous, close one, as well as, a contemporary, onymous, open review in our private mailing list for Peer Discussion.

9 Under the Clause 0 : We immediately accept for publication a research paper directly resulting from a Project Report, or a Diploma-, Master-, or PhD-thesis, which already the author has successfully defended before a committee of experts, as long as he can mention 2 members of this committee who approved his Work.

10 Under the Clause 0 : We immediately accept for publication any paper which is not Openly Accessible on the Internet.

11 We immediately publish online a paper, as soon as it is accepted for publication in the Journal.

12 We quickly publish an extra issue—that is in excess of the 3 issues we publish a year—as soon as the review process of 3 papers is completed.

**Reviewers** – Every peer may voluntarily become a reviewer of the Journal in his skillfulness for as long as he wishes. In addition, each author of the Journal must review one paper in his expertness for each one of his published papers.

**Readers** – Every reader is a potential post-reviewer: we welcome comments and post-reviews in our private mailing list for Peer Discussion.

**Editors** – Every editor owns a PhD degree—to objectively prove that he really has the working experience of passing through the dominant publishing system. An editor pre-reviews a paper in order to check its compliance to our guiding principles and to select the appropriate reviewers of it. We can accept for consideration papers only in the expertise areas currently shown in the Editorial Team page, above. However, since we are very willing to amplify and extend the Scope of the Journal, we welcome the volunteer expert, in any related subject, who wants to join the Editorial Team as long as he unreservedly accepts our guiding principles.

### Electronic Publishing

We regularly use the Free Libre Open Source Software Libre Office with the Free Liberation Mono font and the Freewares PDFCreator and PDF-Xchange Viewer. We also use, with some basic html code of ours: the Free Open Source Software Open Journal System OJS by the Public Knowledge Project PKP installed in our website, and the Free Open Digital Library of

Internet Archive website, where we upload Issues, Paper reprints, *About* documents, and Volumes, in both portrait and landscape orientations, for exceptionally clear online reading with the Free Open Source BookReader.

### Submissions

We can consider only papers submitted in a format which is fully compatible with LibreOffice—preferably in odt format.

**Legal Notice** – It is taken for granted that the submitter–correspondent author accepts, without any reservation, the totality of our publication conditions as they are analytically detailed here, in this *About*, as well as, that he also carries, in the case of a paper by multiple authors, the independent will of each one of his coauthors to unreservedly accept all the aforementioned conditions for their paper.

### Internet Addresses

**Internet Publishing Website** : ftpj.otoiser.org

**Internet Archive Digital Library** : archive.org/details/@ftpj

**Printing-on-Demand** : pod@ftpj.otoiser.org

**Principal Contact** : principal-contact@ftpj.otoiser.org

**Technical Support** : technical-support@ftpj.otoiser.org

**Editorial Team–Technical Support List** : etts.ftpj.otoiser.org

**Peer Discussion List** : peers.ftpj.otoiser.org

**Submissions** : sub@ftpj.otoiser.org

**Sample Paper Template** : template.ftpj.otoiser.org

### ARG NfP AoI

Antennas Research Group

Not-for-Profit Association of Individuals \*

arg.op4.eu – arg@op4.eu

Hauptstraße 52, 2831 Scheiblingkirchen, Austria

\* The Constitution of Greece, Article: 12(3) 2008:

[www.hellenicparliament.gr/en/Vouli-ton-Ellinon/To-Politevma](http://www.hellenicparliament.gr/en/Vouli-ton-Ellinon/To-Politevma)

\* The Hellenic Supreme Court of Civil and Penal Law:

[www.areiospagos.gr/en/](http://www.areiospagos.gr/en/) – Court Rulings:Civil|A1|511|2008

---

*This document is licensed under a Creative Commons Attribution 4.0 International License – <https://creativecommons.org/licenses/by/4.0/>*

# Thoughts on the Possibility of Damage of High-Voltage Electrical Insulation below the so-called Inception Voltage: The Historical Background – Part I

M.G. Danikas, Yi Yin, Jialei Hu \*

[1] Department of Electrical and Computer Engineering,  
Power Systems Laboratory,  
Democritus University of Thrace, Xanthi, Greece

[2, 3] Department of Electrical Engineering,  
Shanghai Jiaotong University, Shanghai,  
People's Republic of China

## Abstract

Partial discharges (PD) may cause damage to high-voltage (h.-v.) electrical insulation and eventually breakdown. It is known, however, that sudden breakdowns occurred in industrial insulations after only a few months in service, although they had passed the suggested international specifications tests. In this paper, we investigate the possibility of damage of an h.-v. insulation even below the inception voltage, giving the historical background which led to certain thoughts. References to previous work are given and a differential equation is proposed regarding the possibility of having charging phenomena below the inception voltage.

## Keywords

Partial discharges, high voltage insulation, cavities, inception voltage, leakage currents

## Introduction

PD may cause significant damage to the h.-v. insulation [1], [2]. PD may start from asperities on the electrodes, from enclosed voids, from fissures and/or from enclosed foreign particles [3]. Numerous publications tackled the

question of the relation between PD parameters and insulation damage [4]-[7].

Although a voluminous amount of research has been performed on the questions of insulation damage and PD, no particular attention was given to possible charging

events below inception voltage. However, such events were held responsible (at least partly) for the failure of insulation equipment back in the fifties and the sixties of the last century [8]-[11]. Such incidents were reported, regarding big electrical machines as well as high voltage switches that failed abruptly, although they passed all tests the international technical committees were suggesting [8]. Which were these incidents? In the 1950's one major US manufacturer produced and sold large rotating machines with cast polymer insulation. At that time all available diagnostic techniques suggested that there should be no problem at all from low leakage currents. Surprisingly enough, these rotating machines failed while in service in a few months. Another occasion of impressive failure was registered when another US manufacturer producing 15 kV class vacuum switches, reported that, although all normal tests at that time were done, unexplained erosion of cast epoxy insulation occurred in these switches, only after a few years in service. Such were the incidents that led to the exploration of the below inception regime of charging phenomena [12]. Scientific evidence of "something" happening below inception was

provided by Filippini [13], who suggested that treeing propagation followed growth along current paths. Furthermore, Brancato [14] indicated the possibility of relating current below inception with temperature rise. In his own words, "perhaps the most exciting but speculative project is the development of techniques to determine temperature rise of void surfaces due to partial discharge. ... electrical aging may in reality be a chemical reaction in voids induced by the deposition of energy. This deposition is expended in the raising of the temperature of the walls of the void, in creation of ozone and possibly nascent oxygen which tend to oxidize the surface chemical reactions which in the presence of water components form nitric or nitrous acids which deteriorate the void surfaces and finally mechanical erosion by the resulting ion stream impinging on the void". In the same publication, Brancato also pointed out that measuring or sensing techniques may not be adequate for all classes of dielectric materials or to all aging environments and/or the inadequate sensitivity of some instruments to detect changes. Recent papers point out to the slow decline of inception voltage with time [15]. Is this also an indica-

tion of charging phenomena below the so-called inception? Would such phenomena play a role regarding the decrease/decline of inception voltage?

Hints about possible damaging events below inception voltage were discussed in a brief report by E. Brancato back in 1991 [16]. Previous work on air gaps with a non-uniform electrode arrangement suggested that such charging events were possible [17]-[20]. To the best of our knowledge, until now there are indications of possible charging effects below inception voltage but a definite proof is missing.

It is the purpose of the present paper to offer the historical background of the approach regarding charging events below the inception voltage and to explore a bit further the events below inception. An equation, which was proposed many years ago by Bruning, is discussed.

#### **On the Problem of Inception Voltage - Historical Background**

Inception voltage is called the lowest voltage under a.c. conditions, at which repetitive PD of a specified magnitude in successive cycles are observed, as the applied voltage increases [21]. Above the inception level, an

insulation may deteriorate depending on the magnitude of the imposed voltage. Things become more blurred when an insulation is subjected to an applied voltage which is lower than the extinction voltage (according to the seminal publication by Kelen [21], the extinction voltage is the voltage at which discharges of a specified magnitude will recur when an alternating voltage, which exceeds the discharge-inception voltage, is reduced).

In his important paper, Bruning and colleagues [9], pointed out that unexpected insulation failures occurred despite the fact that the insulation was operating below the inception voltage. In this doctoral thesis, Bruning [8] pointed out that there were problems in tackling and understanding the basics of current-voltage relationships for new insulating materials and/or new devices. For example, the design failure of epoxy insulators, which used the application of criteria for porcelain discharge onset, did not sufficiently characterize low current performance with contamination. On another occasion, there was a lack of fundamental current vs. voltage analytical model for the design of a new type of transformer windings. In many cases of transformer

failures, discharge testing did not indicate low level pre-discharge activities with operation. Problems also arose with underground cables, where aging effects, exacerbated by the presence of water, may give higher discharge currents which are below the level which can be satisfactorily measured. Bruning speculated that low level discharge currents cause a destructive local temperature effect. Problems related to the above questions were revealed in the USA with electrical machines, cables and high-voltage switches, which failed unexpectedly although all of them passed the required tests prescribed by the international technical committees.

All the above point to the fact that there is a need for a fresh approach for this problem, an approach which may give a possible solution to charging effects below inception. Efforts have been undertaken in Bruning's seminal publications [8], [9], where questions such as the following were put:

a) what is the insulation leakage current-voltage characteristic?

b) what is the effect of such a leakage current?

Efforts were also undertaken in some publications,

albeit with a different insulating material and a much simpler electrode arrangement [17]-[20]. In those papers, indications were presented that effects below the so-called inception level may exist. Moreover, experiments performed in polyethylene samples with enclosed cavities, indicated that at relatively low voltages sharp current waveforms were detected. This indicates sudden streamer PD mechanism in enclosed cavities. In previous years, comments regarding the relation between such sudden PD waveforms and events at or below the inception level were offered. It was speculated that there may be sudden bursts related to local rising of temperature in a cavity [22]-[26].

#### **Possible Relation Between PD Events at Inception Voltage and Charging Events below Inception**

Bruning and colleagues [8], [9], [27] proposed an equation describing the quasi-steady state for current flow

$$\nabla^2 V + \nabla V \cdot \nabla s / s = 0 \quad (1)$$

where,  $\nabla$  is the gradient and  $\nabla^2$  is the Laplace operator expressed as a function of the location,  $V$  is the local voltage and  $s$  the local conductivity of the fluid (in

our case air). They also proposed that it would be plausible to state that the local air temperature is related to the local power dissipation which is leakage current times the local voltage gradient. This being true, the local electrical conductivity is related to the local temperature. The question was as to whether such an equation was leading to a burst or sudden PD pulse even below inception. Would this be possible?

In fact the above equation was characterized as the "thermal model" in Bruning's Ph. D. Thesis [8]. It suggests a thermal model of gaseous conduction which under certain conditions of limited diffusion rate of ionized species, low radiant energy loss, and low thermal conductance, a diffuse current flow may generate a diffuse conduction process. Similar pulseless regimes were suggested in [28]. Furthermore, the same direction of research, without however being so specific, was pointed out in [29], [30], where pseudoglow regimes were observed. It may well be that the current not indicated on a conventional PD detector is a current below the detection level.

More in detail, if one assumes that in the gas there

is a dissipative current flow, using classical notation,

$$\nabla V \cdot J = 0 \quad (2)$$

$$J = sE \quad (3)$$

$$\nabla \cdot sE = 0, \text{ but } E = \nabla V \quad (4)$$

and consequently,

$$\nabla^2 V + \nabla V \cdot \nabla s / s = 0 \quad (5)$$

The above equation, in the case of a constant conductivity  $s$ , reduces to the well known Laplace/Poisson equation. However, for a gaseous conduction process, where there is a partial variable ionization as  $J$  varies with time and position, we have finally Eq. (5).

As was noted in a previous paper [27], solution of the distributed - perhaps pulseless current flow - then proceeds from ionization determined from both Saha's equation and the heat balance determining the local temperature. The complexity of the transport processes have not permitted ab initio calculations. However, approximations indicate a variation of current density and field strengths, which indicate the possibility of current below the detection level. Whether the continuous thermal conduction model arises from true continuous conduction or from

pulses too short to be detectable by conventional PD detectors, it is a question in need of an answer. It is interesting to note, however, that sudden bursts of pulses at or below the so-called inception voltage were observed recently, not only in conventional polymers but also - albeit less frequently - in nanocomposites [31], [32].

Research by Bruning and colleagues [9], [10] indicated that damage observed below inception was very similar to the damage above inception. In these papers, indications were offered that chemical changes below inception were similar to those noted above inception. Such indications gave strong ground for suggesting that "something" goes on below the inception voltage. Chemical changes that indicate chemical deterioration below inception imply the existence of charging phenomena that may render shorter the lifetime of the insulation. Charging effects below the inception voltage may imply that there is no voltage below which no deterioration takes place. More precisely, it is known that the lifetime  $L$  (time to failure) is given by the formula

$$L = c(V - V_0)^{-k} \quad (6)$$

where,  $V$  is the applied volt-

age,  $V_0$  is the voltage below which no deterioration takes place and  $k$  is a constant.  $k$ ,  $V_0$ , and  $c$  are constants depending on the insulation material (it should be noted that original form of Eq. (6), referred to in [33], was

$$L = (A - \alpha)^k (V - \alpha A)^{-k}$$

where,  $L$  is life in minutes,  $A$  is the 1 min strength,  $\alpha$  is a material constant,  $k$  is another material constant and  $V$  is the applied voltage). However, if one assumes that there is damage below the inception voltage, then

$$V_0 = 0 \quad (7)$$

and Eq. (6) becomes

$$L = cV^{-k} \quad (8)$$

As was noted in [9], "most equipment designers use this empirical relation without having settled the fundamental question as to whether  $V_0 = 0$  or not, since empirical experiments in reasonable time periods cannot distinguish between the two forms", i.e. that of Eq. (6) from that of Eq. (8). Ambiguities regarding Eq. (6) still remain to this day, especially if one looks at insulation lifetime models [34]. The question of whether  $V_0 = 0$  is also relevant to the sensitivity of PD detector as well as to the

thickness of the examined insulation, deserves to be further explored. It was reported before, that scaling laws exist, i.e. a thicker insulation requires a more sensitive PD detector [35], [36]. Needless to say that the sensitivity of a PD detector determines the inception voltage of either an insulating material or a full insulation system, or in the words of one of the most distinguished researchers of the good old generation, E. Brancato, "... electric stresses in the absence of internal discharges can cause changes in material properties. Some ascribe the changes to electrochemical reactions, while others express the suspicion that the observed changes are really caused by partial discharges but the corona detecting system is too insensitive" [37].

From the above it is indicated that, although there is not yet a universal name to it, "something" must occur below the inception voltage. Whether this "something" can be referred to as "charging phenomenon" or can be manifested as "signal", is not yet clear. Moreover, if one sees the more practical questions and if one tackles the problems of the role of antioxidants in cable insulation,

one may say that antioxidants are incorporated to prevent premature degradation during extrusion, but the role of the residual antioxidant on insulation response to aging stresses has not yet been quantified, especially in voltages below the inception level [38].

### Conclusion

The present paper is an introduction to the problem of possible charging effects below the so-called inception voltage. The historical background of an approach - different from the usual approaches - is given as well as the indications that charging phenomena below inception may exist. Below inception sudden pulses were observed with an electrode arrangement of point-plane with air as insulating material. It is speculated that minute abnormalities on the cavity surface may act as emission sites and thus provoke small charging phenomena not easily detected by normal conventional PD detectors. An equation regarding the current flow in a cavity was given and commented upon. In a future publication, a solution of the said differential equation will be given together with appropriate comments.

### References

- [1] Mason J.H., "Discharges", IEEE Transactions on Electrical Insulation, Vol. 13, No. 4, 1978, pp. 211-238
- [2] Devins J.C., "The physics of partial discharges in solid dielectrics", IEEE Transactions on Electrical Insulation, Vol. 19, No. 5, 1984, pp. 475-495
- [3] Danikas M.G., Karlis A.D., "Some observations on the dielectric breakdown and the importance of cavities in insulating materials used for cables and electrical machines", Advances in Electrical and Computer Engineering, Vol. 11, No. 2, 123-126, 2011
- [4] Garcia G., Fallou B., "Equipment for the energy measurement of partial discharges", Proceedings of the 1st International Conference on Conduction and Breakdown in Solid Dielectrics, Toulouse, France, 4-8 July 1983, Conf. Rec. 83CH1836-6-EI, pp. 275-281
- [5] Pearmain A.J., Danikas M.G., "A study of the behavior of a uniaxially orientted polyethylene tape/oil insulating system subjected to electrical and thermal stresses", IEEE Transactions on Electrical Insulation, Vol. 22, No. 4, 1987, pp. 373-382
- [6] Gulski E., "Digital analysis of partial discharges", IEEE Transactions on Dielectrics and Electrical Insulation, Vol. 2, No. 5, 1995, pp. 822-837
- [7] Krivda A., "Automated recognition of partial discharges", IEEE Transactions on Dielectrics and Electrical Insulation, Vol. 2, No. 5, 1995, pp. 796-821
- [8] Bruning A.M., "Design of electrical insulation systems", Ph. D. Thesis, University of Missouri-Columbia, USA, 1984
- [9] Bruning A.M., Kasture D.G., Campbell F.J., Turner N.H., "Effect of cavity current on polymer insulation life", IEEE Transactions on Electrical Insulation, Vol. 26, No. 4, 1991, pp. 826-836
- [10] Turner N.H., Campbell F.J., Bruning A.M., Kasture D.G., "Surface chemical changes of polymer cavities with currents above and below corona inception voltage", Annual Report on Conference of Electrical Insulation and Dielectric Phenomena (CEIPD), 18-21 October 1992, Victoria, B. C., Canada, pp. 687-693
- [11] Bruning A.M., Danikas M.G., "Observations on discharges above and below CIV in polymer insulation", Annual Re-

- port on Conference of Electrical Insulation and Dielectric Phenomena, 20-23 October 1991, Knoxville, Tennessee, USA, pp. 638-647
- [12] Bruning A.M., Campbell F.J., Kasture D.G., Turner N.H., "Voltage induced insulation aging - Chemical deterioration from sub-corona currents in polymer void occlusions", research Project Number: RP8007-1, July 1990, Interim-Phase 1 (Contractor: naval research Laboratory (NRL), Washington, D. C., Contractor: Lectromechanical Design Co. (LM)), Herndon, Virginia)
- [13] Filippini J.C., "Mechanical aspects of water treeing in polymers", Conference Record of the 1990 IEEE International Symposium on Electrical Insulation, Toronto, Canada, 3-6 June 1990, pp. 183-186
- [14] Brancato E.L., "Status of aging in insulating materials and systems", Conference record of the 1985 International Conference on Properties and Applications of Dielectric Materials, June 24-29, 1985, Xi'an, People's Republic of China, IEEE Paper I-7
- [15] Hossam-Eldin A.A., Dessouky S.S., El-Mekawy S.M., "Internal discharge in cavities in solid dielectric materials", Journal of Electrical Engineering, Vol. 9, No. 4, 2009 ( "www.jee.ro" )
- [16] Brancato E.L., "Electrical aging - A new insight", IEEE Electrical Insulation Magazine, Vol. 6, 1990, pp. 50-51
- [17] Danikas M.G., Prionistis F.K., "Detection and recording of partial discharges below the so-called inception voltage", Facta Universitatis, Series Electronics and Energetics, Vol. 17, No. 1, 2004, pp. 99-110
- [18] Danikas M.G., Vrakotsolis N., "Experimental results with small air gaps: Further thoughts and comments on the discharge (or charging phenomena) below the so-called inception voltage", Journal of Electrical Engineering, Vol. 56, No. 9-10, 2005, pp. 246-251
- [19] Danikas M.G., Pitsa D., "Detection and registration of partial discharge events below the so-called inception voltage: The case of small air gaps", Journal of Electrical Engineering, Vol. 59, No. 3, 2008, pp. 160-164
- [20] Danikas M.G., "Detection and recording of partial discharges below the inception voltage with a point-plane electrode arrangement in air: Experimental data and definitions", Journal of Electrical Engineering, Vol. 61, No. 3, 2010, pp. 177-182
- [21] Kelen A., "Studies on partial discharges on solid dielectrics: A contribution to the discharge resistance testing of insulating materials", Acta Polytechnica Scandinavica, Electrical Engineering Series, Monograph of 138 pages, 1967
- [22] Danikas M.G., "Discharge studies in solid insulation voids", 1990 Annual Report of the Conference on Electrical Insulation and Dielectric Phenomena (CEIDP), October 28-31, 1990, Pocono Manor, USA, pp. 249-254
- [23] Danikas M.G., "Some further comments on the fast measurements of partial discharges in polyethylene voids", Proceedings of the 20th Electrical and Electronics Insulation Conference, October 7-10, 1991, Boston, USA, pp. 220-224
- [24] Danikas M.G., "Fast measurements of partial discharges in polyethylene cavities with the aid of a subdivided electrode arrangement: A study of circuit parameters on the waveshape of the detected PD currents", Journal of Electrical Engineering, Vol. 51, No. 3-4, 2000, pp. 75-80
- [25] Danikas M.G., "Partial discharge behaviour of two (or more) adjacent cavities in polyethylene samples", Journal of Electrical Engineering, Vol. 52, No. 1-2, 2001, pp. 36-39
- [26] Morshuis P., "Assessment of dielectric degradation by ultrawide-band PD detection", IEEE Transactions on Dielectric and Electrical Insulation, Vol. 2, No. 5, 1995, pp. 744-760
- [27] Danikas M.G., Bruning A.M., "Comparison of several theoretical sub-corona to corona transition relations with recent experimental results", Conference Record of the 1992 IEEE International Symposium on Electrical Insulation, June 7-10, 1992, Baltimore, USA, pp. 383-388
- [28] Isa H., Sonoi Y., Hayashi M., "Breakdown process of a rod-to-plane gap in atmospheric air under DC voltage stress", IEEE Transactions on Electrical Insulation, Vol. 26, No. 2, 1991, pp. 291-299
- [29] Bartnikas R., "Some observations on the character of corona discharges in short gap spaces", IEEE Transactions on Electrical Insulation, Vol. 6, No. 2, 1971, pp. 63-75
- [30] Bartnikas R., d' Ombrain G.L., "A study of corona discharge rate and energy loss in spark gaps", IEEE Tran-



**\* About The Authors**

- sactions on Power Apparatus and Systems, Vol. 84, No. 9, 1965, pp. 770-778
- [31] Danikas M.G., Zhao X., Cheng Y.-H., "Experimental data on epoxy resin samples: Small partial discharges at inception voltage and some thoughts on the possibility of the existence of charging phenomena below inception voltage", *Journal of Electrical Engineering*, Vol. 62, No. 5, 2011, pp. 292-296
- [32] Zhang Y., Danikas M.G., Zhao X., Cheng Y.-H., "Charging phenomena below the inception voltage: Effects of nano-fillers on epoxy", *Malaysian Polymer Journal*, Vol. 7, No. 2, 2012, pp. 68-73
- [33] Montsinger V.M., "Breakdown curve for solid insulation", *AIEE Transactions on Electrical Engineering*, Vol. 54, No. 12, 1935, pp. 1300-1301
- [34] Simoni L., "Life models of insulating materials for combined thermal-electrical stresses", *Colloquium on "Ageing of insulating materials under electrical and thermal stresses"*, 1/12/1980, Dig. No. 1980/72, pp. 1.1-1.9
- [35] Danikas M.G., "Some possible new applications of a partial discharge (PD) model and its relation to PD-detection sensitivity", *European Transactions on Electrical Power*, Vol. 6, No. 6, 1996, pp. 445-448
- [36] Danikas M.G., Vassiliadis G.E., "Models of partial discharges (PD) in enclosed cavities in solid dielectrics: A study of the relationship of PD magnitudes to the sensitivity of PD detectors and some further comments on insulation lifetime", *Journal of Electrical Engineering*, Vol. 54, No. 5-6, 2003, pp. 132-135
- [37] Brancato E.L., "Insulation aging - A historical and critical review", *IEEE Transactions on Electrical Insulation*, Vol. 13, No. 4, 1978, pp. 308-317
- [38] Bernstein B., Private Communication, October 2008

*Michael Danikas*, Issue 2, Year 1, 2013, p. 39

*Yi Yin*, is Professor at Shanghai Jiaotong University, Shanghai, Department of Electrical Engineering. He teaches and conducts research in the areas of high voltage engineering and of insulating materials, especially on polymer dielectric properties and applications, nanocomposite polymers and condition monitoring of electrical apparatus.

*Jialei Hu*, is a postgraduate student at Shanghai Jiaotong University, Department of Electrical Engineering, carrying out his Ph.D. under the supervision of Professor Yi Yin. He is doing research on polymeric materials relevant to high voltage engineering.

**Previous Publication in FUNKTECHNIKPLUS # JOURNAL**

"Diagnostic Techniques in Transformer Oils:  
Factors Affecting the Lifetime of Transformer Oil  
in Transformers of 150/20 kV and the Problem of Relating  
Diagnostics Data with their Pre-history",  
Issue 6, Year 2, pp. 27-40

---

This paper is licensed under a Creative Commons Attribution 4.0  
International License – <https://creativecommons.org/licenses/by/4.0/>

## A Planar Delta-Cross Shaped Loop Antenna: Analysis and Simulation - The 2 WL Case

G.A. Papadaniel, N.I. Yannopoulou, P.E. Zimourtopoulos \*

- [1] Independent Researcher, Thessaloniki, Greece  
 [2, 3] Antennas Research Group, Hellas – Austria

### Abstract

A planar Delta-Cross shaped loop antenna is proposed. The presentation includes results from an analytic study of the radiation pattern, as well as, from a simulation study for both the electric and radiation characteristics: input impedance, standing wave ratio, radiation pattern and directivity. The loop was initially shaped as 4 non-overlapping equilateral triangles on a plane, symmetrically oriented around a common vertex, center fed at one triangle base. In order to improve the antenna characteristics, its shape was then modified by equally changing the triangle base angle-while keeping the loop length constant and equal to 2 wavelengths WL. In this way, the final antenna loop was shaped with 4 isosceles triangles. The analytical and simulated results for the radiation pattern were found to be in good agreement. Furthermore, a comparison with antenna's dipole counterpart characteristics showed a much better performance of the proposed antenna.

### Keywords

Cross loop antenna, delta elements, analysis, simulation, improvement

### Introduction

The cross loop antenna consisting of four delta elements was examined as a prototype antenna during preparation of an EECE diploma thesis [1]. The main available tools for its study were the antenna theory [2], the [RadPat4W] computer program

for antenna patterns [3] the [RICHWIRE] simulation program [4] and the mini-Suite of software tools [5]. Its simple plane figure of double symmetry with respect to two axes which means easy geometrical representation for the theoretical consideration of its radiation pattern as well

as for the simulation and easy construction, was the basic reason for this proposal. The initial antenna consists of four equilateral triangles with side length  $\lambda/6$  and almost coincident their four vertices. Thus, the total length of the antenna is  $2\lambda$ . The feed source was at the middle of the base of one of the triangles as it is shown in Fig. 1.

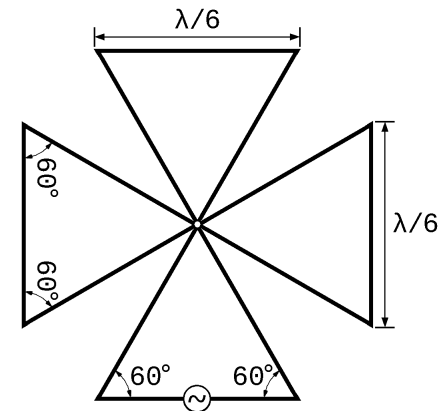


Fig. 1: Planar Delta-Cross Shaped Loop antenna

Then, the antenna was modified only with respect to the base angles of the triangles, keeping constant the triangle perimeter equal to  $\lambda/2$ , resulting a cross antenna of four isosceles triangles. The angle was varied between  $48^\circ$  and  $78^\circ$ , in order to improve both of its electrical and radiative characteristics and the one with

$48^\circ$  angle was selected as the improved Delta-Cross Shaped Loop antenna.

### Analysis

The initial antenna was analytical studied considering standing waves, that is, sinusoidal, current distribution in a parallel wire transmission line. Since the perimeter of each equilateral triangle is  $\lambda/2$ , the total antenna length is equal to  $2\lambda$  and it corresponds to a properly formed short circuited transmission line. However, the study was carried out in a  $5\lambda/2$  piece of open circuited transmission line, formed properly as in Fig. 2, since the available formula of equation (1) concerns open circuited two parallel wired transmission lines

$$\dot{I}(\ell) = \dot{I} \sin(\beta(h - |\ell|)) \quad (1)$$

with

$$-h \leq \ell \leq +h \text{ where } h = \frac{5}{4}\lambda .$$

The above current distribution (1) was used to evaluate the radiation pattern of the antenna through the relations

$$\vec{E} = e^{i\beta R_{kr}} \text{PF} \begin{bmatrix} \ell_\theta \\ \ell_\varphi \end{bmatrix} \quad (2)$$

$$\text{PF} = \int_{\ell_A}^{\ell_T} \dot{I}(\ell) e^{i\beta \ell_r \ell} d\ell \quad (3)$$

According to the basic standing wave theory: i) the direction of current changes per  $\lambda/2$  segment, ii) between two successive standing wave nodes the current phase remains the same and iii) if a source is between two successive standing waves the current direction does not change. These principles were applied at the properly bended 2-wire transmission line of Fig 2, keeping in mind that the Kirchhoff laws must be simultaneously satisfied.

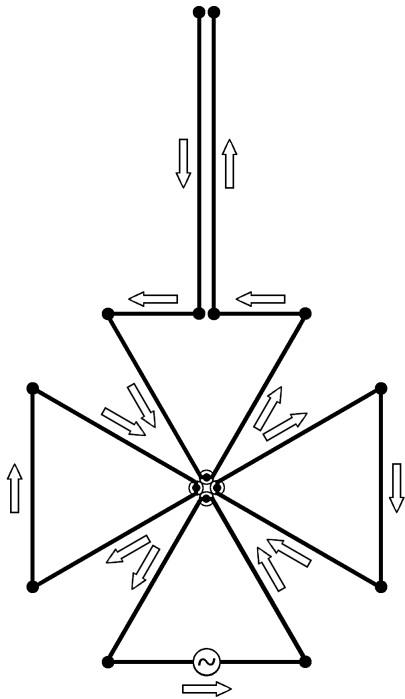


Fig. 2:  $5\lambda/2$  properly bended 2-wire transmission line

The double arrows indicate the direction of  $i\vec{l}$  product for every one segment, and the dotted circles at the almost coincident vertices of the four equilateral triangles correspond to a zero in the current distribution.

The two parallel  $\lambda/4$  segments are almost coincident with opposite currents, so they are mutually canceled as for the radiation and they are excluded from further study. Thus, the remaining segments form the desired antenna, with total length  $2\lambda$  and a current maximum at the source, as it is shown in Fig. 3.

For every one segment 0-12, of Fig. 3, we had to determine four quantities: the length of its starting point  $l_A$ , the length of its end point  $l_T$ , the position vector of its center  $\vec{R}_k$ , as if they were part of the corresponding line of  $2\lambda$  length, and its unit direction vector  $\vec{l}_i$ , with its direction to be in all segments from  $l_A$  to  $l_T$ . The planar antenna was arranged on  $yOz$  as it is shown in Fig. 4, along with all the  $\vec{R}_k$  position vectors as they were determined by the relation

$$\vec{R}_{k_v} = \vec{O}A_v - l_{A_v} \vec{l}_v \quad (4)$$

and Tab. 1 contains all the above mentioned geometrical quantities.

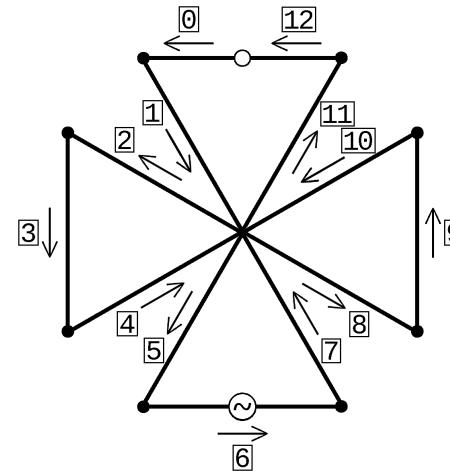


Fig. 3: 13 segments

Then through (1)-(3), that is, after the evaluation of the definite integral for the Pattern Factor PF [2], [6] the radiation pattern of all the 13 segments was formulated and according to the law of superposition the total radiation pattern is given by

$$\begin{aligned} \vec{E} &= \sum_{v=0}^{12} \begin{bmatrix} \dot{E}_{v\theta} \\ \dot{E}_{v\phi} \end{bmatrix} = \begin{bmatrix} \dot{E}_\theta \\ \dot{E}_\phi \end{bmatrix} = \dot{E}_\theta \vec{\theta}_i + \dot{E}_\phi \vec{\phi}_i = \\ &= (\dot{E}_{\theta_R} + i\dot{E}_{\theta_I}) \vec{\theta}_i + (\dot{E}_{\phi_R} + i\dot{E}_{\phi_I}) \vec{\phi}_i \end{aligned} \quad (5)$$

which, after a lot of symbolic manipulation where the real parts are mutually eliminated, leads to a more simplified expression

$$\vec{E} = \begin{bmatrix} \dot{E}_\theta \\ \dot{E}_\phi \end{bmatrix} = i (\dot{E}_{\theta_I} \vec{\theta}_i + \dot{E}_{\phi_I} \vec{\phi}_i) \quad (6)$$

and by the symmetry of the geometry radiation patterns of 0th, 12th and 6th wire are combined, as well as the five (5) couples: 1, 7 - 2, 8 - 3, 9 - 4, 10 and 5, 11 as it is obvious from Tab. 1. Thus, the total radiation pattern is

$$\begin{aligned} \vec{E} &= \vec{E}_{0,12,6} + \vec{E}_{1,7} + \vec{E}_{2,8} + \\ &+ \vec{E}_{3,9} + \vec{E}_{4,10} + \vec{E}_{5,11} \end{aligned} \quad (7)$$

### Simulation

The simulation process was carried out in terms of [RICHWIRE] program. The center frequency was 1111 [MHz] where the wavelength is  $\lambda = 0.27$  [m] and the wire radius was 1 [mm]. We studied the antenna characteristics both electric and electromagnetic (SWR, Input Impedance, Directivity, Radiation Pattern) in the range [600, 1300] MHz around the center frequency with a 10 [MHz] step.

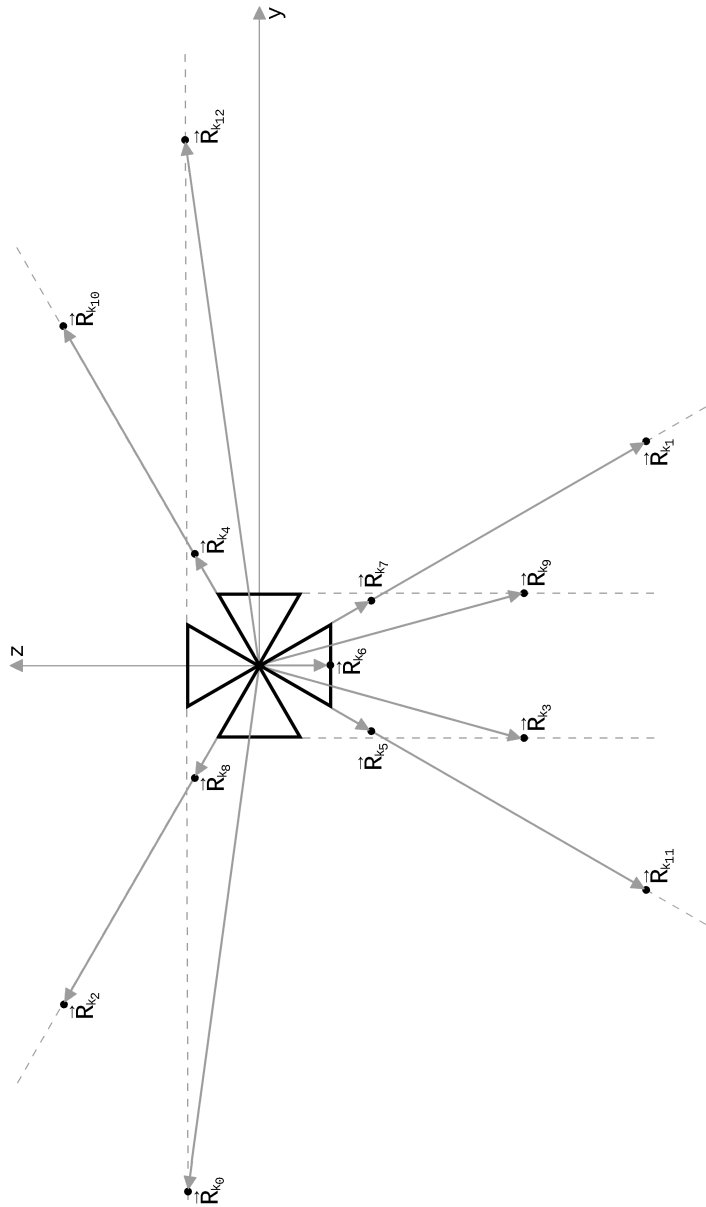


Fig. 4: 13 position vectors

Tab. 1: Geometrical Data

#	$l_A$	$l_T$	$\vec{R}_k$		$\beta R_{k_r}$
			$\vec{y}_i$	$\vec{z}_i$	
0	$-\lambda$	$-\frac{11}{12}\lambda$	$-\lambda$	$\frac{\sqrt{3}}{12}\lambda$	$-2\pi\sin\theta\sin\varphi + \frac{\sqrt{3}\pi}{6}\cos\theta$
1	$-\frac{11}{12}\lambda$	$-\frac{9}{12}\lambda$	$\frac{3}{8}\lambda$	$-\frac{3\sqrt{3}}{8}\lambda$	$\frac{3\pi}{4}\sin\theta\sin\varphi - \frac{3\sqrt{3}\pi}{4}\cos\theta$
2	$-\frac{9}{12}\lambda$	$-\frac{7}{12}\lambda$	$-\frac{3\sqrt{3}}{8}\lambda$	$\frac{3}{8}\lambda$	$-\frac{3\sqrt{3}\pi}{4}\sin\theta\sin\varphi + \frac{3\pi}{4}\cos\theta$
3	$-\frac{7}{12}\lambda$	$-\frac{5}{12}\lambda$	$-\frac{\sqrt{3}}{12}\lambda$	$-\frac{\lambda}{2}$	$-\frac{\sqrt{3}\pi}{6}\sin\theta\sin\varphi - \pi\cos\theta$
4	$-\frac{5}{12}\lambda$	$-\frac{3}{12}\lambda$	$\frac{\sqrt{3}}{8}\lambda$	$\frac{\lambda}{8}$	$\frac{\sqrt{3}\pi}{4}\sin\theta\sin\varphi + \frac{\pi}{4}\cos\theta$
5	$-\frac{3}{12}\lambda$	$-\frac{\lambda}{12}$	$-\frac{\lambda}{8}$	$-\frac{\sqrt{3}}{8}\lambda$	$-\frac{\pi}{4}\sin\theta\sin\varphi - \frac{\sqrt{3}\pi}{4}\cos\theta$
6	$-\frac{\lambda}{12}$	$\frac{\lambda}{12}$	0	$-\frac{\sqrt{3}}{12}\lambda$	$-\frac{\sqrt{3}\pi}{6}\cos\theta$
7	$\frac{\lambda}{12}$	$\frac{3}{12}\lambda$	$\frac{\lambda}{8}$	$-\frac{\sqrt{3}}{8}\lambda$	$\frac{\pi}{4}\sin\theta\sin\varphi - \frac{\sqrt{3}\pi}{4}\cos\theta$
8	$\frac{3}{12}\lambda$	$\frac{5}{12}\lambda$	$-\frac{\sqrt{3}}{8}\lambda$	$\frac{\lambda}{8}$	$-\frac{\sqrt{3}\pi}{4}\sin\theta\sin\varphi + \frac{\pi}{4}\cos\theta$
9	$\frac{5}{12}\lambda$	$\frac{7}{12}\lambda$	$\frac{\sqrt{3}}{12}\lambda$	$-\frac{\lambda}{2}$	$\frac{\sqrt{3}\pi}{6}\sin\theta\sin\varphi - \pi\cos\theta$
10	$\frac{7}{12}\lambda$	$\frac{9}{12}\lambda$	$\frac{3\sqrt{3}}{8}\lambda$	$\frac{3}{8}\lambda$	$\frac{3\sqrt{3}\pi}{4}\sin\theta\sin\varphi + \frac{3\pi}{4}\cos\theta$
11	$\frac{9}{12}\lambda$	$\frac{11}{12}\lambda$	$-\frac{3}{8}\lambda$	$-\frac{3\sqrt{3}}{8}\lambda$	$-\frac{3\pi}{4}\sin\theta\sin\varphi - \frac{3\sqrt{3}\pi}{4}\cos\theta$
12	$\frac{11}{12}\lambda$	$\lambda$	$\lambda$	$\frac{\sqrt{3}}{12}\lambda$	$2\pi\sin\theta\sin\varphi + \frac{\sqrt{3}\pi}{6}\cos\theta$

#	$\vec{\ell}_i$		$\ell_r$	$\ell_\theta$	$\ell_\phi$
	$\vec{y}_i$	$\vec{z}_i$			
0	-1	0	$-\sin\theta\sin\varphi$	$-\cos\theta\sin\varphi$	$-\cos\varphi$
1	$\frac{1}{2}$	$-\frac{\sqrt{3}}{2}$	$\frac{1}{2}\sin\theta\sin\varphi - \frac{\sqrt{3}}{2}\cos\theta$	$\frac{1}{2}\cos\theta\sin\varphi + \frac{\sqrt{3}}{2}\sin\theta$	$\frac{1}{2}\cos\varphi$
2	$-\frac{\sqrt{3}}{2}$	$\frac{1}{2}$	$-\frac{\sqrt{3}}{2}\sin\theta\sin\varphi + \frac{1}{2}\cos\theta$	$-\frac{\sqrt{3}}{2}\cos\theta\sin\varphi - \frac{1}{2}\sin\theta$	$-\frac{\sqrt{3}}{2}\cos\varphi$
3	0	-1	$-\cos\theta$	$\sin\theta$	0
4	$\frac{\sqrt{3}}{2}$	$\frac{1}{2}$	$\frac{\sqrt{3}}{2}\sin\theta\sin\varphi + \frac{1}{2}\cos\theta$	$\frac{\sqrt{3}}{2}\cos\theta\sin\varphi - \frac{1}{2}\sin\theta$	$\frac{\sqrt{3}}{2}\cos\varphi$
5	$-\frac{1}{2}$	$-\frac{\sqrt{3}}{2}$	$-\frac{1}{2}\sin\theta\sin\varphi - \frac{\sqrt{3}}{2}\cos\theta$	$-\frac{1}{2}\cos\theta\sin\varphi + \frac{\sqrt{3}}{2}\sin\theta$	$-\frac{1}{2}\cos\varphi$
6	1	0	$\sin\theta\sin\varphi$	$\cos\theta\sin\varphi$	$\cos\varphi$
7	$-\frac{1}{2}$	$\frac{\sqrt{3}}{2}$	$-\frac{1}{2}\sin\theta\sin\varphi + \frac{\sqrt{3}}{2}\cos\theta$	$-\frac{1}{2}\cos\theta\sin\varphi - \frac{\sqrt{3}}{2}\sin\theta$	$-\frac{1}{2}\cos\varphi$
8	$\frac{\sqrt{3}}{2}$	$-\frac{1}{2}$	$\frac{\sqrt{3}}{2}\sin\theta\sin\varphi - \frac{1}{2}\cos\theta$	$\frac{\sqrt{3}}{2}\cos\theta\sin\varphi + \frac{1}{2}\sin\theta$	$\frac{\sqrt{3}}{2}\cos\varphi$
9	0	1	$\cos\theta$	$-\sin\theta$	0
10	$-\frac{\sqrt{3}}{2}$	$-\frac{1}{2}$	$-\frac{\sqrt{3}}{2}\sin\theta\sin\varphi - \frac{1}{2}\cos\theta$	$-\frac{\sqrt{3}}{2}\cos\theta\sin\varphi + \frac{1}{2}\sin\theta$	$-\frac{\sqrt{3}}{2}\cos\varphi$
11	$\frac{1}{2}$	$\frac{\sqrt{3}}{2}$	$\frac{1}{2}\sin\theta\sin\varphi + \frac{\sqrt{3}}{2}\cos\theta$	$\frac{1}{2}\cos\theta\sin\varphi - \frac{\sqrt{3}}{2}\sin\theta$	$\frac{1}{2}\cos\varphi$
12	-1	0	$-\sin\theta\sin\varphi$	$-\cos\theta\sin\varphi$	$-\cos\varphi$

The total number of 96 segments for the whole antenna, where all sides had equal number of points, was selected for the simulation, after the investigation for 13, 24, 48, 72, 96, 120, 144, 168, 192, 216, 240 segments. The above mentioned characteristics remained almost constant after this number of 96 segments. An appropriate computer program was developed in Fortran to create the input file with antenna geometry for [RICHWIRE].

A very good agreement between simulated and analyti-

cal produced radiation patterns is shown in Fig. 5 for the three main planes in 1111 [MHz], although there is a point for discussion here. A closer examination, after 7 years from the initial work [1], of what was really compared in Fig. 5, proved that the analytical patterns illustrated corresponds to rather an upper bound of the absolute radiation pattern since it results from the sum of the 13 absolute radiation patterns and not from the total absolute radiation pattern.

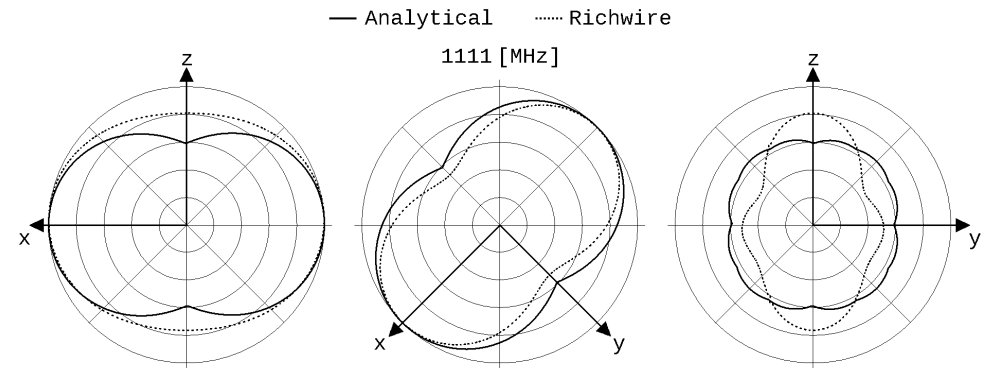


Fig. 5: Radiation patterns in 1111 [MHz]

Furthermore, the simulation model, as it is shown in Fig. 6, consists inevitable not in four equal delta elements but in four truncated ones, as care must be taken a) to avoid the overlapping of the wires in a future construction and b) to reduce the strong cou-

pling caused by the proximity effect.

Thus, the minimum permitted square region with side  $(2a+a/10)$ , where "a" is the used wire radius, was removed from the center intersection point of the four delta elements, while in the same time, in order to achieve the

connection of the neighboring sides, the base angles of every element are slightly greater than  $60^\circ$ , and the total length of such formed element was slightly greater than the initial  $\lambda/2$ .

in Fig. 7, made clear the need for further research on the antenna's geometry.

The antenna was modified only with respect to the base angles for constant delta perimeter, resulting a Delta-cross Loop antenna of four isosceles triangles. A computer program was also developed in Fortran producing the corresponding input data for [RICHWIRE].

The investigation was performed from the value of  $48^\circ$  for the base angles to  $78^\circ$  in step of  $1^\circ$  at the frequency of 1111 [MHz]. The best performance was noticed between  $48^\circ$  and  $52^\circ$  and the model, shown in Fig. 8, with  $48^\circ$  base angles was selected.

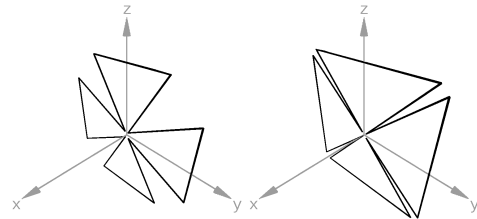


Fig. 6: Simulation models

Extremely high values of Standing Wave Ratio [SWR] in 1111 [MHz] for the three characteristic impedances 50, 75 and 300  $[\Omega]$  as it is shown

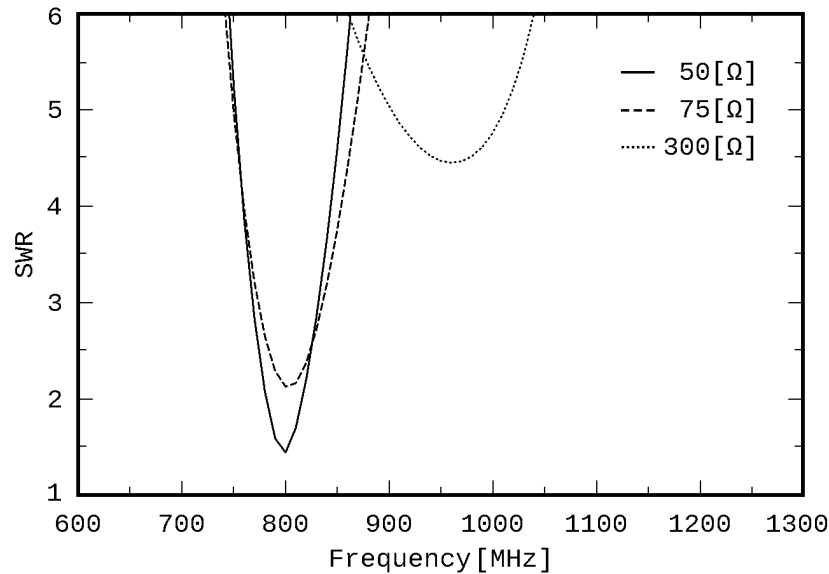


Fig. 7: Standing Wave Ratio against frequency

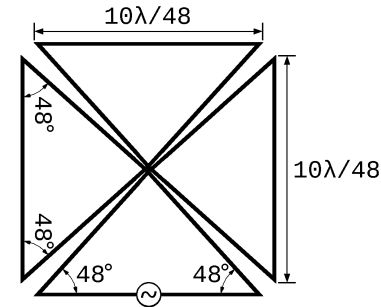


Fig. 8: Improved antenna

In Figs. 9 - 13 SWR, Input Impedance [ $Z_{inp}$ ] as Input Resistance  $R_{inp}$  and Input Reactance  $X_{inp}$  in  $[\Omega]$  and Directivity  $D$  in [dB] of the improved antenna together with that of the initial one and of  $2\lambda$  dipole, are shown respectively. Fig. 12 shows a properly selected window of the total frequency range for the Input Impedance in order to clarify the improvement of the modified antenna. In Figs. 14 - 15 a comparison of the radiation patterns of the three antennas is given at five frequencies in the three main planes  $zOx$ ,  $xOy$  and  $yOz$ . In Fig. 16 the 3D analytical radiation pattern at 1111 [MHz] and in Fig. 17 the corresponding 3D patterns in all frequencies are shown.

**Conclusion**

Although, the agreement of results between simulation and analysis was very good,

the characteristics of the initial antenna were not satisfactory. An improvement process was needed and the research was here limited to the change of the base angles only to the rather small range of  $-12^\circ$ ,  $+18^\circ$  around the initial  $60^\circ$  base angle. Thus, the improved antenna had the best performance about 100 MHz lower of the desired frequency of 1111 [MHz], as it is shown in Figs. 9 - 13. The SWR for the 50  $[\Omega]$  characteristic impedance has its best value closer to 1111 [MHz] while the initial antenna and the  $2\lambda$  dipole of equivalent length had a relative small value of SWR at about 800 [MHz] (Fig. 9). It is also obvious that the Input Impedance as well as Directivity is relatively stable and slightly better for the improved antenna and much better from the initial one (Figs. 10 - 13). Corresponding values for SWR, Input Impedance and Directivity for the three antennas are given in Tab. 2.

The radiation pattern of the improved antenna is closer to that of a centered fed sinusoidal  $\lambda/2$  dipole, avoiding the dispersion of radiation in multiple directions of the rather long  $2\lambda$  dipole antenna (Figs. 14 - 15, 17).

Tab. 1: SWR, D,  $Z_{inp}$

	SWR	D [dB]	$Z_{inp}$ [ $\Omega$ ]
1111 [MHz]			
60°	43.7	2.49	40 - i 287
2 $\lambda$	26.1	4.09	577 - i 647
48°	6.55	3.10	70 + i 127
800 [MHz]			
60°	1.44	2.61	36 + i 5
2 $\lambda$	2.55	3.21	88 - i 52
48°	42.7	2.30	24 - i 219
1010 [MHz]			
60°	29.6	2.85	1297 + i 485
2 $\lambda$	20.4	3.74	993 + i 168
48°	1.26	2.90	40 + i 3

An extensive investigation concerning the analytical determination of the antenna radiation pattern and its normalized absolute values is in the immediate future plans of the authors in order to achieve the clarification of its relation with the one produced by simulation.

A wider range of the base angle variation or the variation of the total length of each delta element are some design ideas for a future research work. Nevertheless, the final step is, without doubt, the construction and measurement of the proposed antenna together with the comparison of the corresponding results.

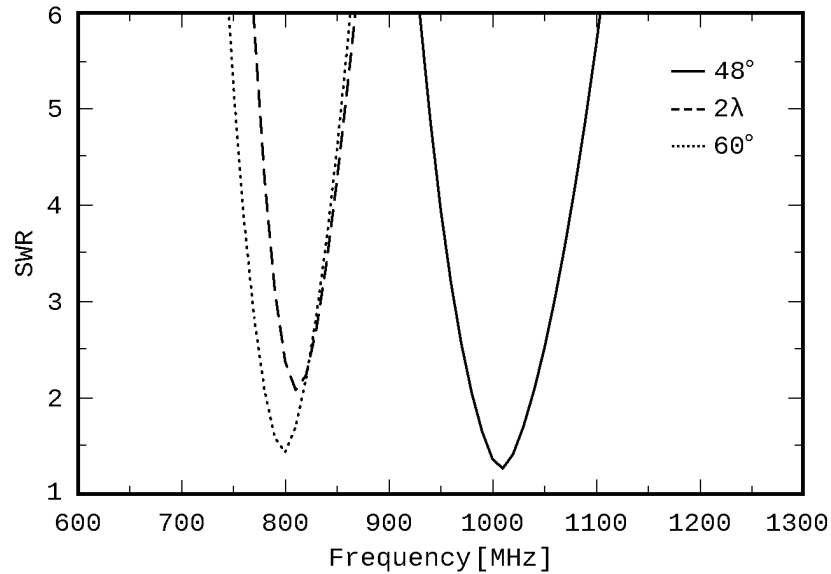


Fig. 9: SWR for improved-48°, 2 $\lambda$  and initial-60° antenna

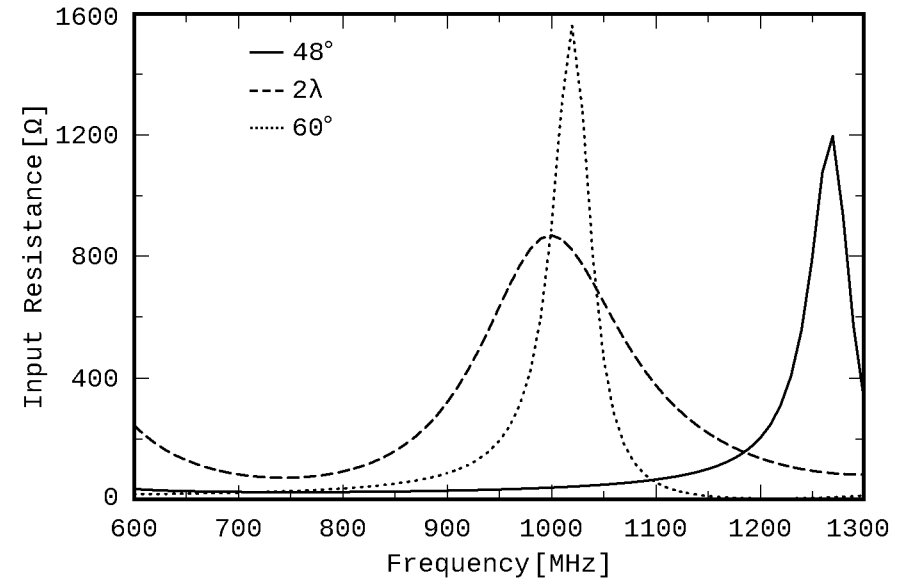


Fig. 10:  $R_{inp}$  for improved-48°, 2 $\lambda$  and initial-60° antenna

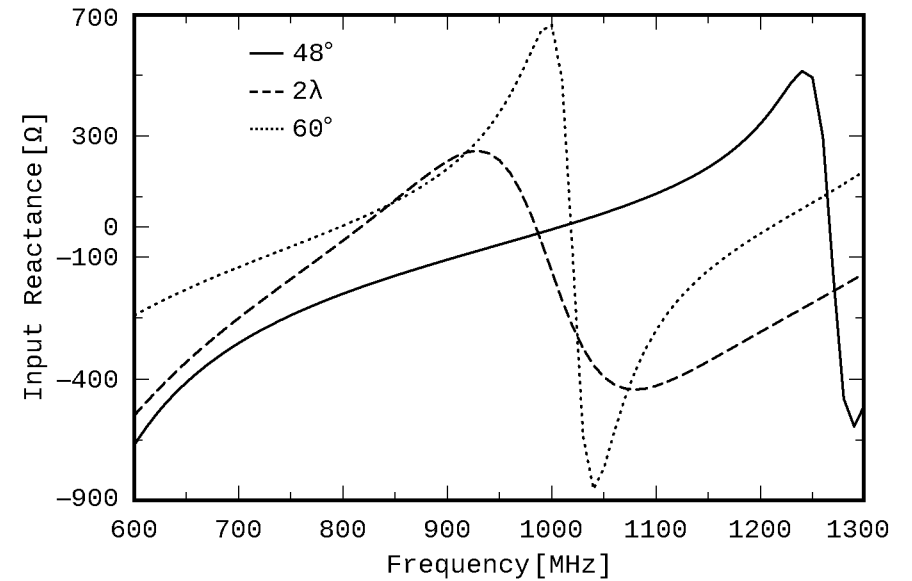


Fig. 11:  $X_{inp}$  for improved-48°, 2 $\lambda$  and initial-60° antenna

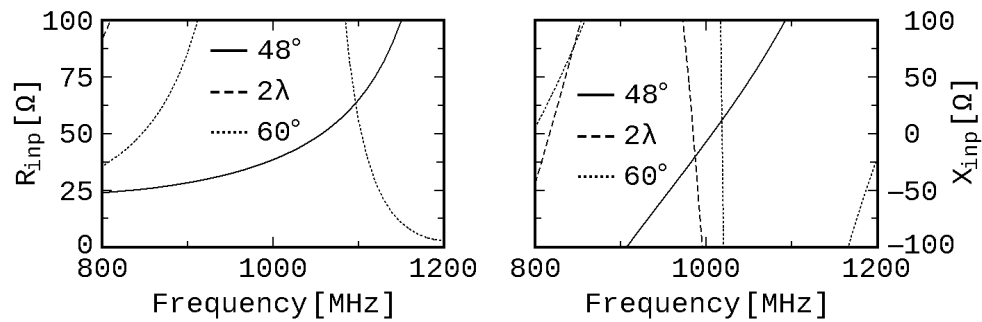


Fig. 12:  $R_{inp}$ ,  $X_{inp}$  for the three antennas in [800, 1200] MHz

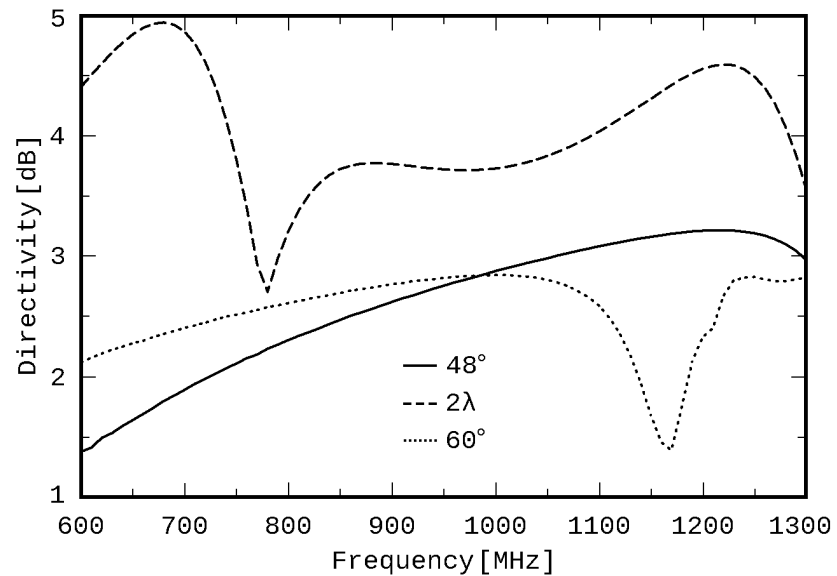


Fig. 13: Directivity of the three antennas

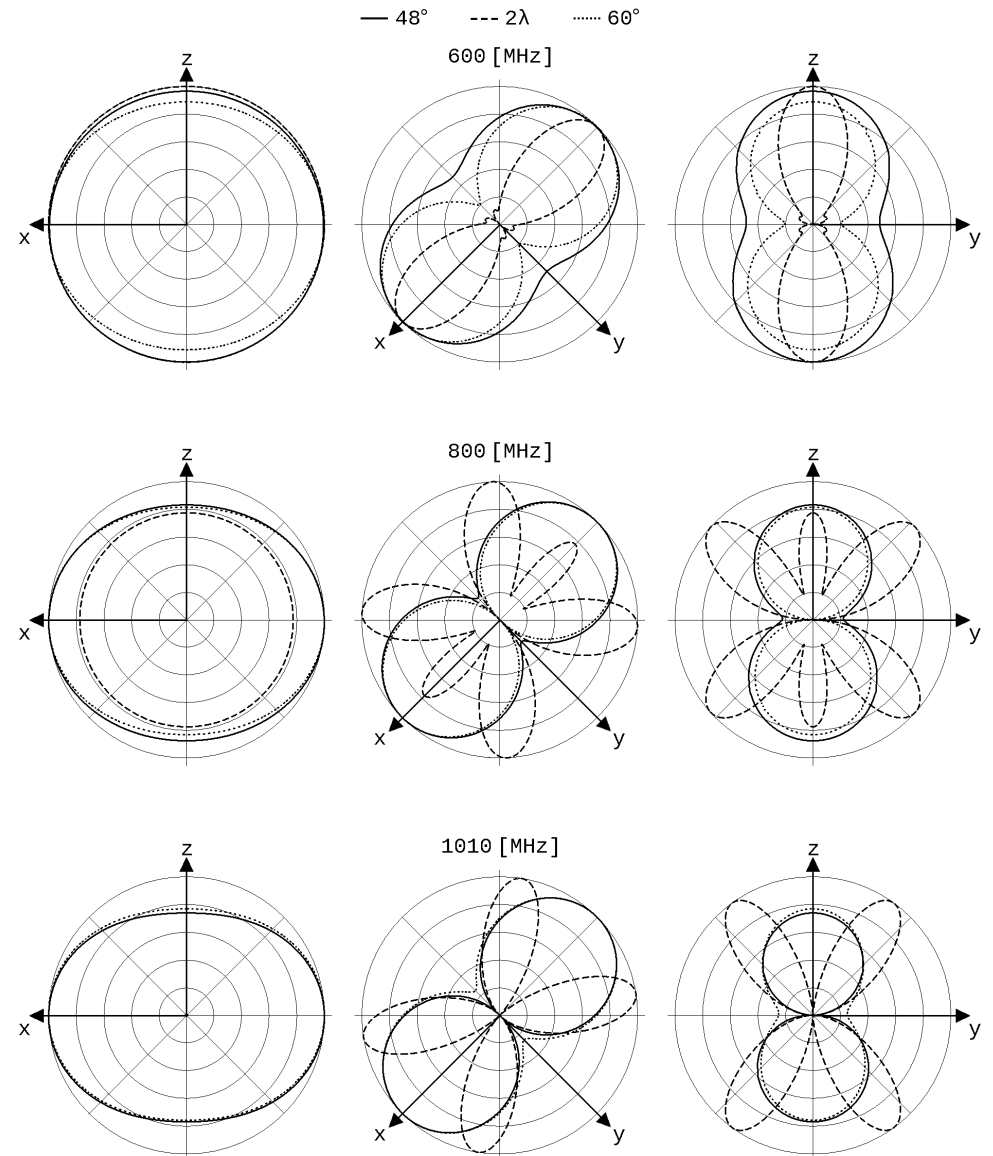


Fig. 14: Radiation patterns at 600, 800 and 1010 [MHz]



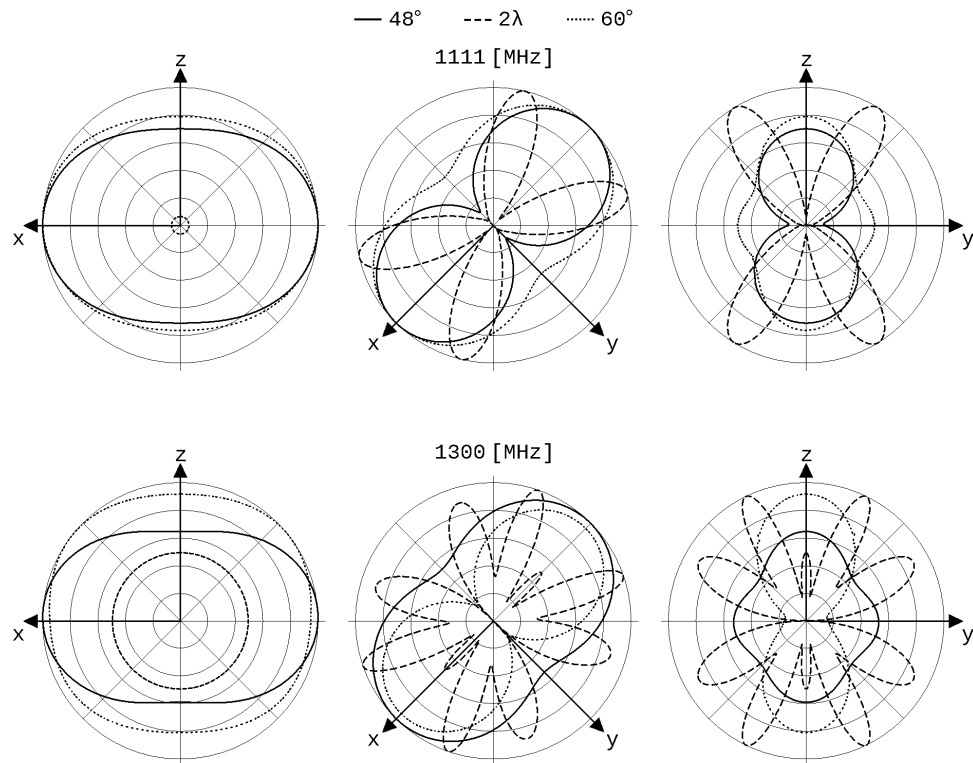


Fig. 15: Radiation patterns at 1111 and 1300 [MHz]

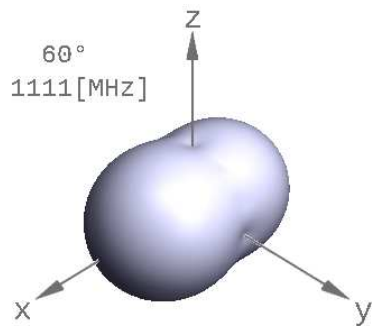


Fig. 16: 3D Analytical Radiation Pattern

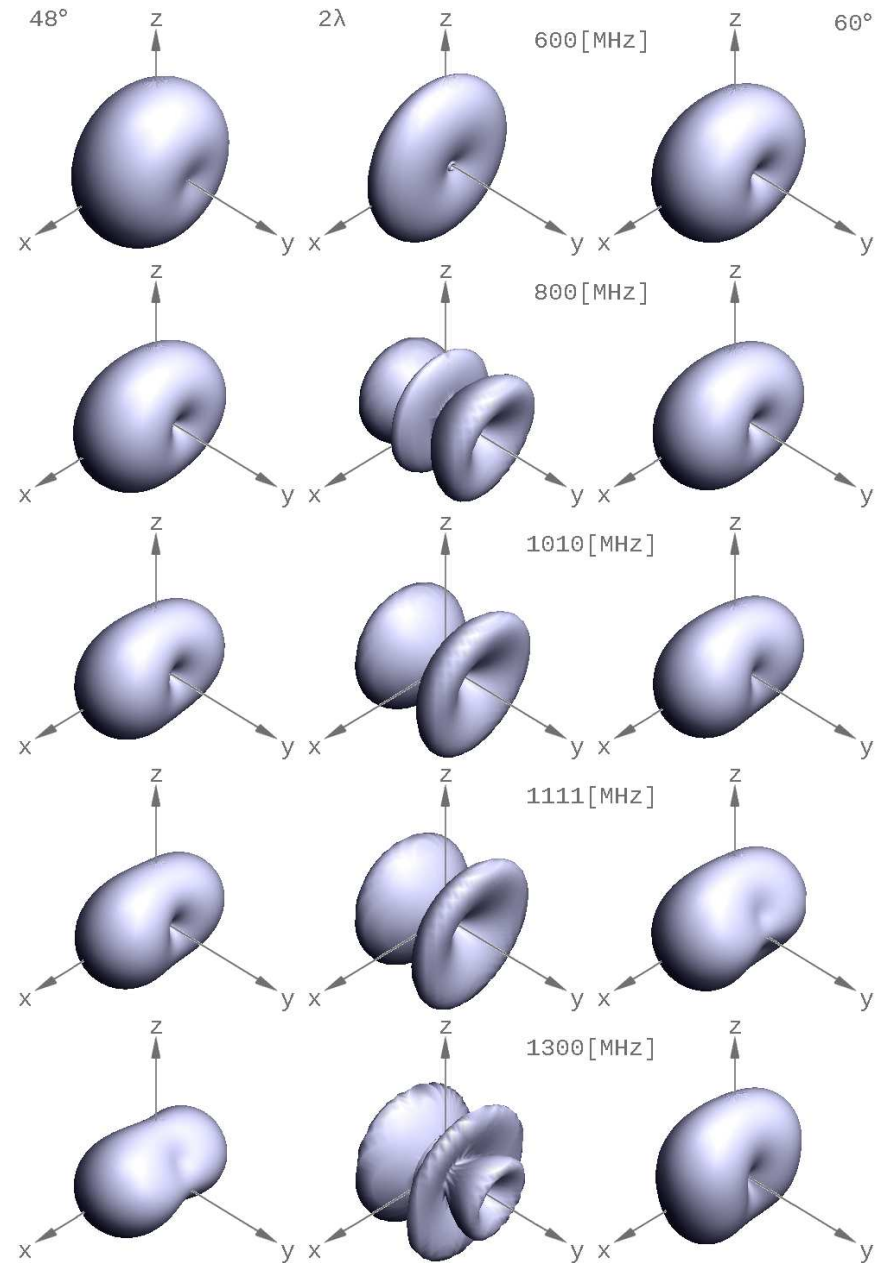


Fig. 17: 3D Simulated Radiation Patterns

**References \***

- [1] Papadaniel G., "The Eisernes Kreuz Antenna [Prototype ARG-06]", Diploma Thesis #40, ARG-Antennas Research Group, DUTH, 2007 (in Greek)
  - [2] Zimourtopoulos P., "Antenna Notes 1999-, Antenna Design Notes 2000-", "www.antennas.gr/antennanotes/" (in Greek)
  - [3] Yannopoulou N., Zimourtopoulos P., "A FLOSS Tool for Antenna Radiation Patterns", Proceedings of 15th Conference on Microwave Techniques, COMITE 2010, Brno, Czech Republic, pp. 59-62
  - [4] Richmond J.H., "Computer program for thin-wire structures in a homogeneous conducting medium", Publication Year: 1974, NTRS-Report/Patent Number: NASA-CR-2399, ESL-2902-12, DocumentID: 19740020595, "http://ntrs.nasa.gov/"
  - [5] Yannopoulou N., Zimourtopoulos P., "Mini Suite of Antenna Tools", Educational Laboratories, Antennas Research Group, 2006, "www.antennas.gr/antsoft/minisuiteoftools/"
  - [6] Yannopoulou N.I., "Study of monopole antennas over a multi-frequency decoupling cylinder", PhD Thesis, EECE, DUTH, February 2008 (in Greek), pp. (2-6)-(2-9)
- \*Active Links: 27.05.2015 - Inactive Links : FTP#J Link Updates: "http://updates.ftpj.otoiser.org/"

*Papadaniel Glykeria*, was born in Rodolivos-Amfipolis, Serres, Greece in 1981. She graduated from Electrical Engineering and Computer Engineering in 2007 from Democritus University of Thrace, Xanthi, Greece. Member of Antennas Research Group while she was elaborated her diploma thesis. She did practice exercise in the Hellenic Telecommunication Organisation and she worked as an Engineer in Clima, Voltampere Energy and Rodax Companies for the study/design of Photovoltaic systems, wind farms, natural gas plants and electrical installations in a thermoelectric power station. She is a certified three-dimensional graphics and computer aided Designer.

g.papadaniel@yahoo.gr

**Follow-Up Research Paper**

Not until now

**Previous Publication in FUNKTECHNIKPLUS # JOURNAL**

"Visual EM Simulator for 3D Antennas: VEMSA3D – FLOSS for MS Windows", Issue 6, Year 2, pp. 7-25

**\* About The Authors**

*Nikolitsa Yannopoulou*, Issue 1, Year 1, p. 15

*Petros Zimourtopoulos*, Issue 1, Year 1, p. 15

---

This paper is licensed under a Creative Commons Attribution 4.0 International License – <https://creativecommons.org/licenses/by/4.0/>

[ This Page Intentionally Left Blank ]

[ This Page Intentionally Left Blank ]

[ This Page Intentionally Left Blank ]

In case of any doubt,  
download the genuine papers from  
[genuine.ftpj.otoiser.org](http://genuine.ftpj.otoiser.org)

#### FRONT COVER VIGNETTE

A faded synthesis of an anthemion rooted in a meandros

The thirteen-leaf is a symbol for a life tree leaf.  
"Herakles and Kerberos", ca. 530–500 BC,  
by Paseas, the Kerberos Painter,  
Museum of Fine Arts, Boston.

[www.mfa.org/collections/object/plate-153852](http://www.mfa.org/collections/object/plate-153852)

The simple meandros is a symbol for eternal immortality.  
"Warrior with a phiale", ca. 480–460 BC,  
by Berliner Maler,  
Museo Archeologico Regionale "Antonio Salinas" di Palermo.

[commons.wikimedia.org/wiki/File:Warrior\\_MAR\\_Palermo\\_NI2134.jpg](http://commons.wikimedia.org/wiki/File:Warrior_MAR_Palermo_NI2134.jpg)